



2 Omega 28

3 Omega 42

4 Omega 56


Omega 28

Designer



Yaacov Kaufman - 2003

Pendant downlight fitting made out of steel and aluminium for direct lighting. The suspensions can be fixed (code 620) or adjustable in height by means of a steel counterbalance (code 630) and a black polyester rope device.

code 620

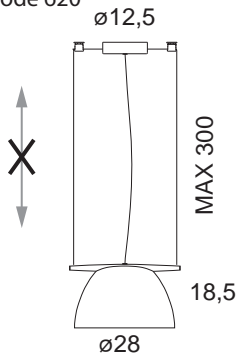

code 630

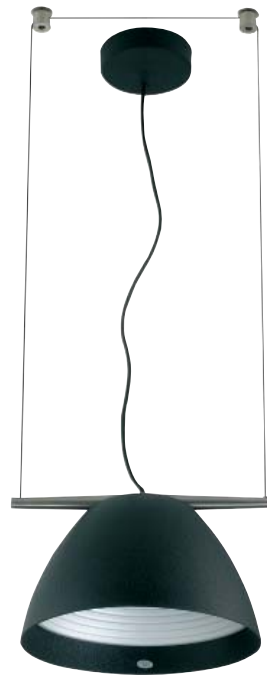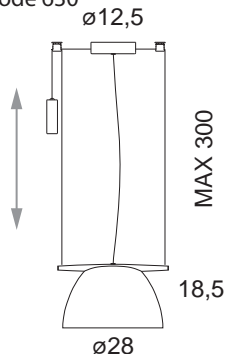

FLUO-COMPACT
FRIENDLY

DIMMABLE

Denominazione - Name - Name **Omega 28 (cod. 620 - 630)**

Certificazioni - Certificates - Prüfzeichen  (IMQ not for col. 20)

Normative - Norms - Normen **EN 60-598-1 (CEI 34-21)**

Lampadina - Light sources - Leuchtmittel **MAX 100W I/HAL - 24W FL EL - E27/E26 (not included)**

Versioni - Available - Versionen **230V (Europe) - 120V (USA - Japan) - 240V (England)**

Classe di isolamento - Insulation Class - Isolierungsklasse **I**

Classe di protezione - Protection Class - Protektionsgrad **IP20**

Imballo - Packaging - Verpackung **0,025m³ - 2,4Kg (cod. 620) - 3,0Kg (cod. 630)**



Col. 09

Nero raggrinzato
Black wrinkled
Schwarz schrumpflack



Col. 11

Bianco goffrato
Crackled white
Weiß aufgerauth



Col. 19

Grigio goffrato
Crackled grey
Grau aufgerauth




Col. 20

Policarbonato
Polycarbonate
Polikarbonat




Col. 37

Ramato arabescato
Copper arabesque
Kupfer arabesk



Cod. 640 - 650
Omega 42



Cod. 660 - 670
Omega 56


Omega 42

Designer


Yaacov Kaufman - 2003

Pendant downlight fitting made out of steel and aluminium for direct lighting. The suspensions can be fixed (code 640) or adjustable in height by means of a steel counterbalance (code 650) and a black polyester rope device.

code 640

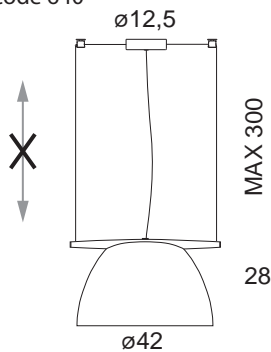

code 650

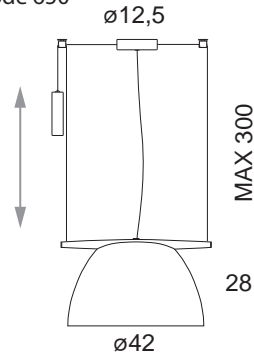

Denominazione - Name - Name **Omega 42 (cod. 640 - 650)**

Certificazioni - Certificates - Prüfzeichen **CE** (IMQ not for col. 20)

Normative - Norms - Normen **EN 60-598-1 (CEI 34-21)**

Lampadina - Light sources - Leuchtmittel **MAX 150W I/HAL - 30W FL EL - E27/E26 (not included)**

Versioni - Available - Versionen **230V (Europe) - 120V (USA - Japan) - 240V (England)**

Classe di isolamento - Insulation Class - Isolierungsklasse **I**

Classe di protezione - Protection Class - Protektionsgrad **IP20**

Imballo - Packaging - Verpackung **0,071m³ - 3,9Kg (cod. 640) - 5,6Kg (cod. 650)**



Col. 09

Nero raggrinzato
Black wrinkled
Schwarz schrumpflack



Col. 11

Bianco gofrato
Crackled white
Weiß aufgerauth



Col. 19

Grigio gofrato
Crackled grey
Grau aufgerauth




Col. 20

Policarbonato
Polycarbonate
Polikarbonat




Col. 37

Ramato arabescato
Copper arabesque
Kupfer arabesk



Cod. 620 - 630
Omega 28



Cod. 660 - 670
Omega 56


Omega 56

Designer


Yaacov Kaufman - 2003

Pendant downlight fitting made out of steel and aluminium for direct lighting. The suspensions can be fixed (code 660) or adjustable in height by means of a steel counterbalance (code 670) and a black polyester rope device.

code 660

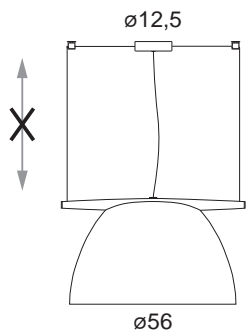

code 670

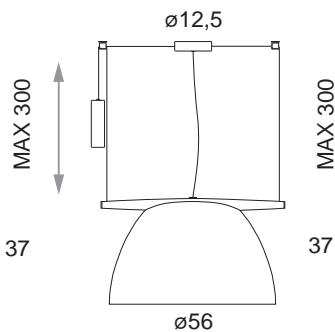

FLUO-COMPACT
FRIENDLY

DIMMABLE

Denominazione - Name - Name **Omega 56 (cod. 660 - 670)**

Certificazioni - Certificates - Prüfzeichen

Normative - Norms - Normen **EN 60-598-1 (CEI 34-21)**

Lampadina - Light sources - Leuchtmittel **MAX 250W I/HAL - 30W FL EL - E27/E26 (not included)**

Versioni - Available - Versionen **230V (Europe) - 120V (USA - Japan) - 240V (England)**

Classe di isolamento - Insulation Class - Isolierungsklasse **I**

Classe di protezione - Protection Class - Protektionsgrad **IP20**

Imballo - Packaging - Verpackung **0,15m³ - 7,1Kg (cod. 660) - 9,3Kg (cod. 670)**



Col. 09

Nero raggrinzato
Black wrinkled
Schwarz schrumpflack



Col. 11

Bianco gofrato
Crackled white
Weiß aufgerauth




Col. 19

Grigio gofrato
Crackled grey
Grau aufgerauth



Col. 37

Ramato arabescato
Copper arabesque
Kupfer arabesk



Cod. 620 - 630
Omega 28



Cod. 640 - 650
Omega 42