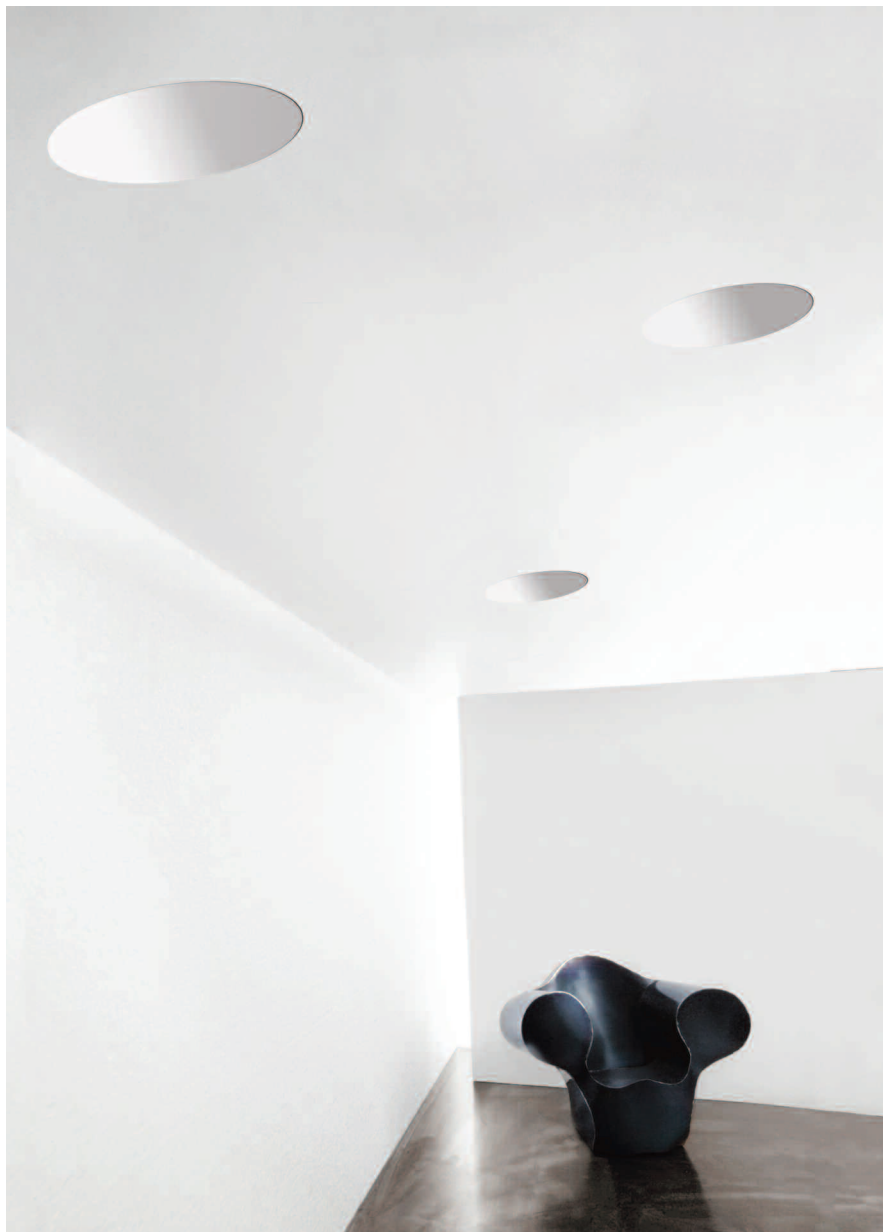


Light Cone S

Ingo Maurer 2005

Fiberglas. Für fugenlosen Einbau in abgehängte Decken. Einbautiefe 18 cm. 230/125 Volt. Mit Leuchtmittel 75 Watt Halogen, 25°, Sockel GU10.

Fibreglass. For flush mounting in lowered ceilings. Installation depth 18 cm. 230/125 volts. Complete with bulb 75 watts halogen, 25°, socket GU10.

Vetroresina. Per l'incasso in controsoffitti. Profondità di montaggio 18 cm. 230/125 volt. Con lampadina 100 watt alogena, 25°, attacco GU10.

Fibre de verre. Pour montage sur plafonds surbaissés. Profondeur de montage 18 cm. 230/125 volts. Livrée avec ampoule 75 watts halogène, 25°, culot GU10.

Ingo MAURER